



PI 500 - Hand-held measuring device for the industry

The new PI 500 is an all-purpose hand-held logger for many applications in the industrial manufacturing, like e. g.:

- Flow measurement
- Pressure/vacuum measurement
- Temperature measurement
- Moisture/dew point measurement


The graphic indication of colored measurement curves is unique.

Up to 100 million measured values can be stored with date and name of measuring site. The measured values can be transferred to a computer by means of a USB stick. The data can be conveniently evaluated with the CS Basic software.

Measured data and service reports can be issued easily and quickly. The following probes can optionally be connected to the freely configurable sensor input of the PI 500:


- Pressure sensors (high and low pressure)
- Flow meters, VA 500/VA 520
- Temperature sensors Pt 100, Pt 1000/4...20 mA
- Dew point sensors FA 510
- Effective power meters
- Optional third-party sensors with the following signals: 0...1/10 V, 0/4...20 mA, Pt 100, Pt 1000, pulse, Modbus

Using the PI 500 with a sensor of your choice

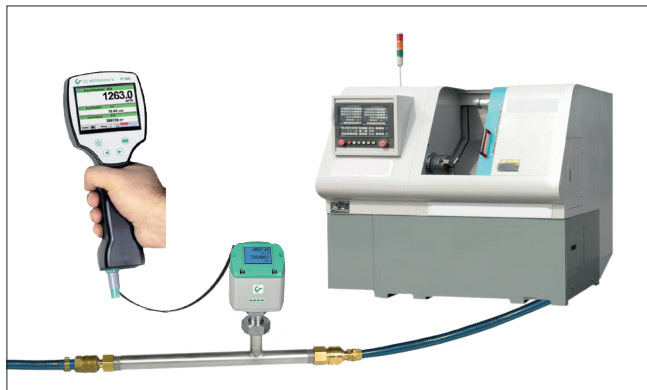

Special features:

- Universal sensor input for many common sensor signals
- Internal rechargeable Li-Ion batteries (approx. 12 h continuous operation)
- 3.5" graphic display / easy operation via touch screen
- Integrated data logger for storage of the measured values
- USB interface for readout via USB stick
- Up to 8 languages selectable



Measurement curves are displayed graphically, so the operator sees at a glance the behaviour of e.g. a dryer from the start of the measurement.

Dew Point			
-46.3 °Ctd			
HI	HD		
8.18 ppm	44.88 mg/m ³		
HC	Tem	C1a Pressure	C1a
25.01 °C		6.540 bar	


All physical parameters of the humidity measurement are calculated automatically.

Time interval (sec)	
1	2 5 10 15 30 60 120 15
<input checked="" type="checkbox"/>	force new record file
Comment: <input type="text" value="Dryer Trockener 13"/>	
Logger stopped	<input checked="" type="checkbox"/> timed Start <input checked="" type="checkbox"/> timed Stop
START	STOP
	12:26:00 - 06.0 13:28:00 - 06.0
Remaining logger capacity = 9999 days	
Logging: 0 channels selected	
time interval (min 1 sec)	
Back	

Up to 100 million measured values can be stored. Each measurement can be stored with a comment, e.g. measuring site name. The time interval can be freely set.



PI 500 - Hand-held measuring instrument with large sensor selection

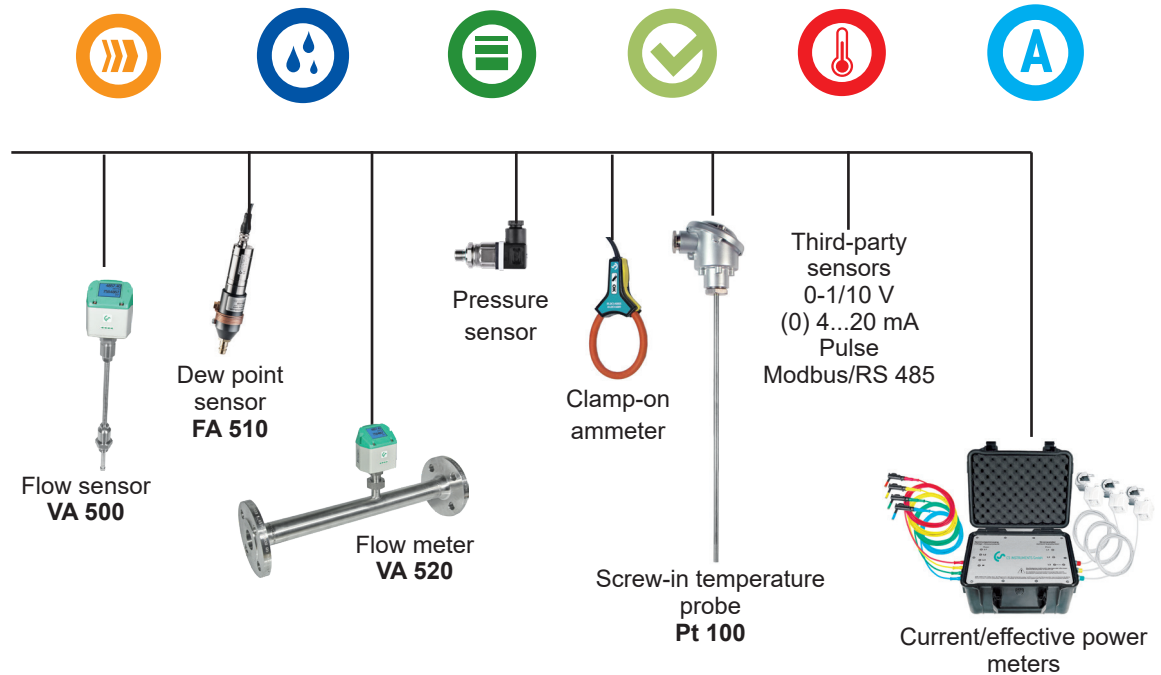

INPUT SIGNALS

Current signals internal or external power supply	(0...20 mA/4...20 mA)
Measuring range	0...20 mA
Resolution	0.0001 mA
Accuracy	± 0.03 mA ± 0.05 %
Input resistance	50 Ω
Voltage signal:	(0...1 V)
Measuring range	0...1 V
Resolution	0.05 mV
Accuracy	± 0.2 mV ± 0.05 %
Input resistance	100 kΩ
Voltage signal	(0...10 V / 30 V)
Measuring range	0...10 V
Resolution	0.5 mV
Accuracy	± 2 mV ± 0.05 %
Input resistance	1 MΩ
RTD Pt 100	
Measuring range	-328...1562 °F
Resolution	0.1 °F
Accuracy	± 0.2 °F (-148...-752 °F) ± 0.3 °F (further range)
RTD Pt 1000	
Measuring range	-328...1562 °F
Resolution	0.1 °F
Accuracy	± 0.2 °F (-148...-752 °F)
Pulse	
Measuring range	Min pulse length 500 μs frequency 0...1 kHz max. 30 VDC

DESCRIPTION

PI 500 portable measuring instrument with integrated data logger

Option: "Mathematics calculation function" for 4 freely selectable channels, (virtual channels): addition, subtraction, division, multiplication

Option: „Totalizer function for analog signals“

CS Basic – data evaluation graphically and in tabular form - reading of the measured data via USB or Ethernet, license for 2 workstations

Transport case

Further sensors can be found on pages 38 to 41

TECHNICAL DATA PI 500

Display:	3.5" touch panel TFT transmissive, graphics, curves, statistics
Interfaces:	USB interface
Power supply for sensors:	Output voltage: 24 VDC ± 10% Output current: 120 mA in continuous operation
Power supply:	Internal rechargeable Li-Ion batteries, charging time approx. 4 h, PI 500 continuous operation > 4h depending on power consumption for ext. sensor
Power adapter:	100 - 240 VAC / 50 - 60 Hz, 12 VDC - 1A, safety class 2 only for use in dry rooms
Dimensions:	3.2 x 3.7 x 9.6 Inches
Housing material:	PC/ABS
Weight:	0.9 lbs
Operating temperature:	32...122 °F ambient temperature
Storage temperature:	-4...158 °F
EMC:	DIN EN 61326
Sensor input:	For connection of pressure and temperature sensors, clamp-on ammeters, third-party sensors with 4 ... 20 mA, 0-10 V, Pt 100, Pt 1000, Modbus
Memory Size:	16 GB memory card standard

ORDER NO.

0560 0511
Z500 5107
Z500 5106
0554 8040
0554 6510