



## FA 500 - Dew point sensor from -112 to 68 °Ftd

The ideal dew point measuring instrument with integrated display and alarm relay for refrigeration, membrane and adsorption dryers.



### Special features:

- Integrated display
- Threshold value adjustable via keypad, alarm relay (max. 60 VDC, 0.5 A)
- Pressure-tight up to 7251 psi (special version)
- Extremely long term stable
- Quick adaption time
- 4...20 mA analog output for dew point
- Different versions for refrigeration and adsorption dryers
- **NEW:** Modbus-RTU interface
- **NEW:** Higher resolution of sensor signal due to the improved evaluation electronics
- **NEW:** Sensor diagnosis on site with a portable device or CS Service Software

### Readable via Modbus:

- Pressure dew point [°Ftd]
- Temperature [°F]
- rel. humidity [% RH]
- abs. humidity [g/m³]
- Degree of humidity [g/m³]
- Moisture content V/V [ppmV/V]
- Water vapor particle pressure [hPa]
- Atmospheric dew point [°Ftd.atm]



The integrated keys enable simple, menu-controlled operation



### Upper connection:

Power supply, 4...20 mA output, Modbus-RTU output

### Lower connection:


Alarm relay



**Option:** Ethernet interface (Modbus TCP or Modbus PoE)



## Easy operation via keys on display

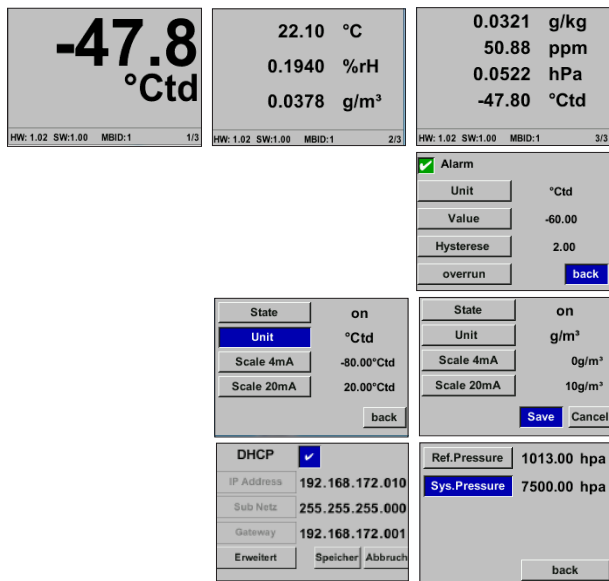

The integrated display shows the dew point in large text as well as further humidity parameters on additional display pages. The arrow key can be used to scroll between the display pages.

The alarm threshold value for the integrated relay can be freely entered via the keys. In addition to the alarm threshold, the hysteresis can also be set.

The 4...20 mA analog output maybe scaled or allocated to one further parameter, e. g. g/m<sup>3</sup>.

After entering the system pressure and reference pressure (atmospheric pressure), sensor can calculate back to the atmospheric dew point from measured pressure dew point if desired.

DESCRIPTION	ORDER NO.
FA 500 dew point sensor for refrigeration dryers, -4...+122 °Ftd	0699 0501
FA 500 dew point sensor for adsorption dryers, -112 to +68 °Ftd	0699 0502
FA 500 dew point sensor for adsorption dryers, -76...+86 °Ftd	0699 0503
<b>Connection cables:</b>	
Connection cable for VA/FA series, 16 ft	0553 0104
Connection cable for VA/FA sensors, 32 ft	0553 0105
Cable for alarm/pulse output, with M12 plug, length 16 ft	0553 0106
Cable for alarm/pulse output, with M12 plug, length 32 ft	0553 0107
Ethernet connection cable length 16 ft, M12 plug x-coded (8 pin) to RJ 45 plug	0553 2503
Ethernet connection cable length 32 ft, M12 plug x-coded (8 pin) to RJ 45 plug	0553 2504
<b>Options for FA 500:</b>	
Option: Integrated pressure sensor 0...30 bar (g)	Z699 0522
Option: Integrated pressure sensor 10...2000 mbar (abs)	Z699 0523
Option: Max. pressure FA5xx 5076 psi	Z699 0515
Option: Max. pressure FA5xx 7251 psi	Z699 0516
Option: Special scaling FA5xx 4...20 mA= ___ ... ___ g/m <sup>3</sup> , ppm etc.	Z699 0514
Option: connection thread FA5xx, 5/8" UNF	Z699 0511
Option: surface condition FA 5xx, free of oil & grease	Z699 0517
Ethernet-interface TCP for VA 500/520 and FA 500	Z695 5006
Ethernet-Interface PoE for VA 500/520 and FA 500	Z695 5007
M-Bus board for VA 500/520 and FA 500	Z695 5004
<b>Further accessories:</b>	
Standard measuring chamber for compressed air NPT 1/2"	0699 3393
BSP High pressure measuring chamber up to 5076 psi	0699 3590
CS Service Software for FA/VA sensors incl. PC connection set, USB connection and interface adapter to the sensor	0554 2007
Mains unit in wall housing for maximum 2 sensors of the series VA/FA 5xx, 100-240 V, 23 VA, 50-60 Hz / 24 VDC, 0.35 A	0554 0110
AC adapter plug 100-240 VAC / 24 VDC for VA/FA 5xx	0554 0109
<b>Calibration and adjustment:</b>	
Precision calibration at -40 °...37.4 °Ftd incl. ISO certificate	0699 3396

### TECHNICAL DATA FA 500

<b>Measuring range:</b>	-112 to +68 °Ftd, -76...+86 °Ftd, -4...+122 °Ftd, or 0...100% RH
<b>Accuracy:</b>	± 1.8°F to 122...-4°Ftd ± 3.6°F to -4...-58°Ftd ± 5.4°F to -58...-112°Ftd
<b>Pressure range:</b>	-1...50 bar (-14.5...725 psi) Special version up to 500 bar (7251 psi)
<b>Power supply:</b>	24 VDC (10...36 VDC)
<b>Protection class:</b>	IP 65
<b>EMC:</b>	In acc. with DIN EN 61326-1
<b>Operating temperature:</b>	-4...+122 °F
<b>Connection:</b>	2 x M12, 5-pin for analog output, Modbus-RTU and alarm output, M-Bus (optional) Ethernet (PoE) (optional)
<b>PC connection:</b>	Modbus-RTU interface (RS 485)
<b>Output: (3-wire)</b>	4...20 mA = -112 to +68 °Ftd 4...20 mA = -76...+86 °Ftd 4...20 mA = -4...+122 °Ftd
<b>Burden for analog output:</b>	< 500 Ω
<b>Alarm relay:</b>	NC, max. 60 VDC, 0.5 A
<b>Screw-in thread:</b>	Stainless steel 1.4404: G 1/2", optional: UNF 5/8", NPT 1/2"
<b>Dimensions housing:</b>	3.01 x 3.35 x 2.95 Inches (WxHxD)